
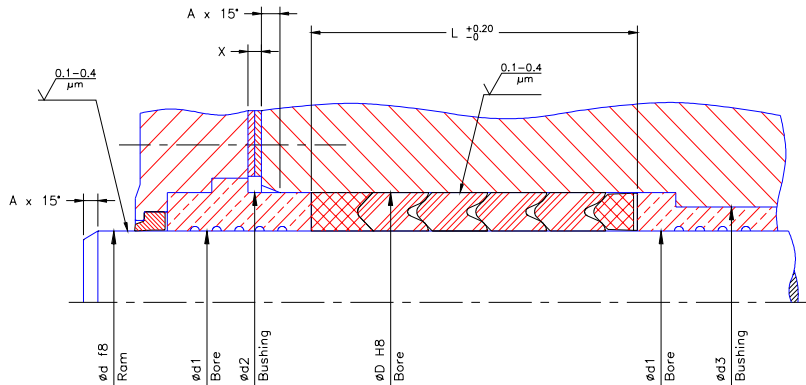


Heavy Duty Press Seal

Type: PressPak SP



Material : Rubber/Fabric

Pressure	9000psi (630 bar)	
Speed	1.65 ft/sec (0.5 m/s)	
Media - Temp compatibility	Min (F)	Max (F)
Hydraulic oil	-22	212
Water based Emulsions	-22	212
Water	-22	212

Benefits:

- Zero leakage & maintenance free
- Large pre-load for positive sealing
- Long life due to robust design
- Endless or split for ease of installation
- Pre-shrunk internal fabric
- Cut to length
- Female acts as anti-extrusion ring

