
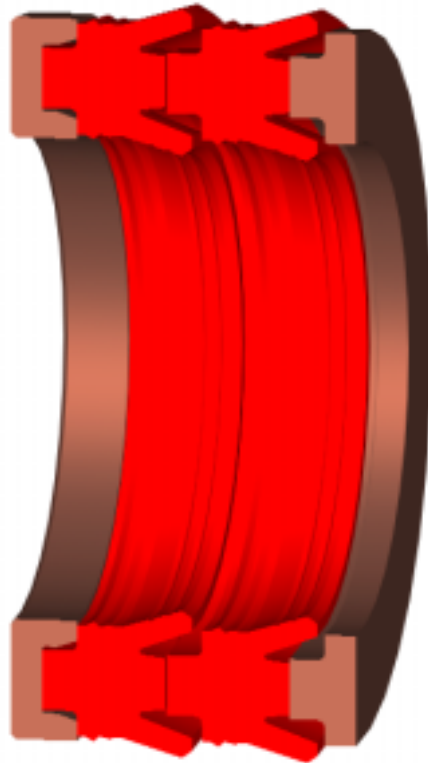


High Pressure Press Seal

Type: **RHINO**



Material : RHINO-Thane

Pressure	6000psi (400 bar)	
Speed	1.65 ft/sec (0.5 m/s)	
Media - Temp compatibility	Min (F)	Max (F)
Hydraulic oil	-38	200
Water based Emulsions	40	180
Water	40	180
Polyol Ester	-38	180


Benefits:

- Zero leakage & maintenance free
- Large pre-load for positive sealing
- Long life due to material and lubrication channels
- Endless or split for ease of installation
- No shimming required

Robust Static and Dynamic Sealing Lips

Heavy-Duty Anti Extrusion Ring

Lubrication Channels

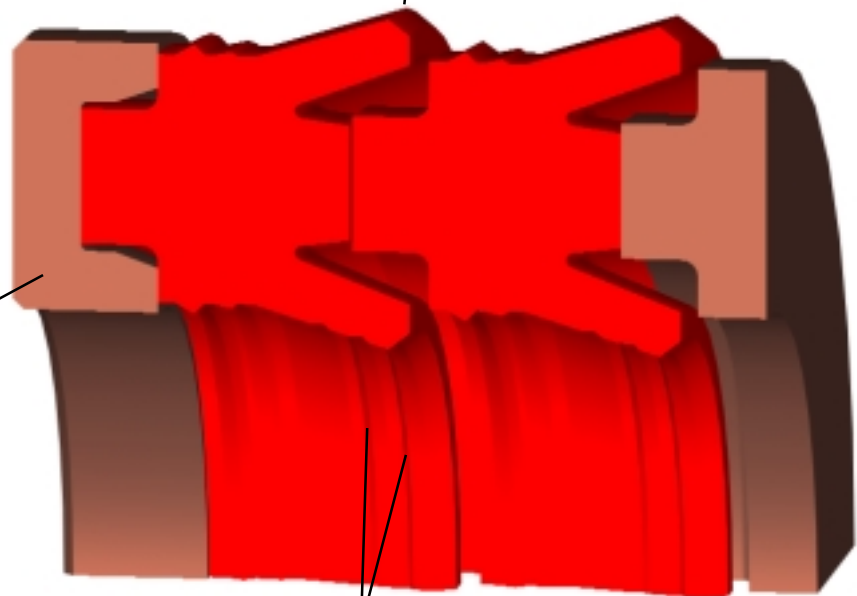

System Seals Inc.